


# Flexible LED Platine / FPC

## 160LED/m - 24V DC - 9,6W/m - 160lm/w



### Technische Daten / technical data

Maße / measurements (LxBxH):	5000x8x2,1mm
LED Type - LED/m:	160LED/m
Schutzart / protection:	IP20
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

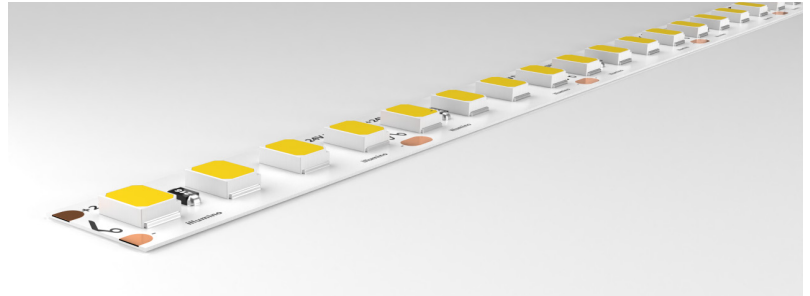

### Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	LED/m	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021N-5000-27-609	24V	2700K	160	1363	9,6W/m	142lm/W
021N-5000-30-608	24V	3000K	160	1478	9,6W/m	154lm/W
021N-5000-40-608	24V	4000K	160	1517	9,6W/m	158lm/W
021N-5000-50-603	24V	5000K	160	1546	9,6W/m	161lm/W
021N-5000-60-611	24V	6000K	160	1546	9,6W/m	161lm/W

### Zeichnung / drawing

