


Flexible LED Platine / FPC

2216 Top LED • 240LED/m • 9,6-19,2W/m



Technische Daten / technical data

Maße / measurements (LxBxH):	5000x8x1,2mm
LED Type - LED/m:	2216 - 240LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	10mA - 20mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

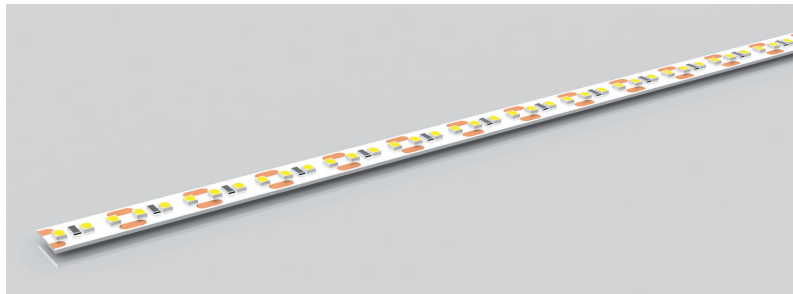

Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021K-5000-27-203	24V	2700K	800lm	9,6W/m	83lm/W
021K-5000-30-203	24V	3000K	810lm	9,6W/m	84lm/W
021K-5000-42-203	24V	4200K	850lm	9,6W/m	89lm/W
021K-5000-54-201	24V	5400K	870lm	9,6W/m	91lm/W
021K-5000-65-203	24V	6000K	850lm	9,6W/m	89lm/W
021K-5000-27-204	24V	2700K	1600lm	19,2W/m	83lm/W
021K-5000-30-208	24V	3000K	1620lm	19,2W/m	84lm/W
021K-5000-42-204	24V	4200K	1700lm	19,2W/m	89lm/W
021K-5000-54-203	24V	5400K	1740lm	19,2W/m	91lm/W
021K-5000-65-204	24V	6000K	1700lm	19,2W/m	89lm/W

Weitere Farben (1800K, 2200K, etc.), sowie weitere Leistungsstufen (14,4W/m) sind auf Anfrage erhältlich.

Zeichnung / drawing

