


Flexible LED Platine / FPC

2835 Top LED • 120LED/m • 14,4W/m



Technische Daten / technical data

Maße / measurements (LxBxH):	5000x8(5)x1,45mm
LED Type - LED/m:	2835 - 120LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	30mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

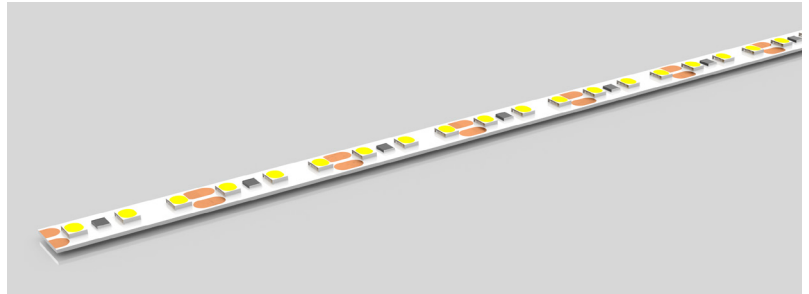

Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021A-5000-27-610	12V	2700K	1180lm	14,4W/m	82lm/W
021A-5000-30-610	12V	3000K	1260lm	14,4W/m	88lm/W
021A-5000-42-611	12V	4200K	1320lm	14,4W/m	92lm/W
021A-5000-54-605	12V	5400K	1420lm	14,4W/m	99lm/W
021A-5000-65-605	12V	6000K	1380lm	14,4W/m	96lm/W
021A-5000-27-604	24V	2700K	1180lm	14,4W/m	82lm/W
021A-5000-30-617	24V	3000K	1455lm	14,4W/m	101lm/W
021A-5000-30-603	24V	3000K	1260lm	14,4W/m	88lm/W
021A-5000-42-603	24V	4200K	1320lm	14,4W/m	92lm/W
021A-5000-54-606	24V	5400K	1420lm	14,4W/m	99lm/W
021A-5000-65-604	24V	6000K	1380lm	14,4W/m	96lm/W
021A-5000-42-605 (5mm)	24V	4100K	1400lm	14,4W/m	97lm/W

Weitere Farben (1800K, 2200K, etc.) sind auf Anfrage erhältlich.

Zeichnung / drawing

