


# Flexible LED Platine / FPC

## 2835 Top LED • 120LED/m • 19,2W/m



### Technische Daten / technical data

Maße / measurements (LxBxH):	5000x8x1,45mm
LED Type - LED/m:	2835 - 120LED/m
Schutzart / protection:	IP20
Strom pro LED:	40mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

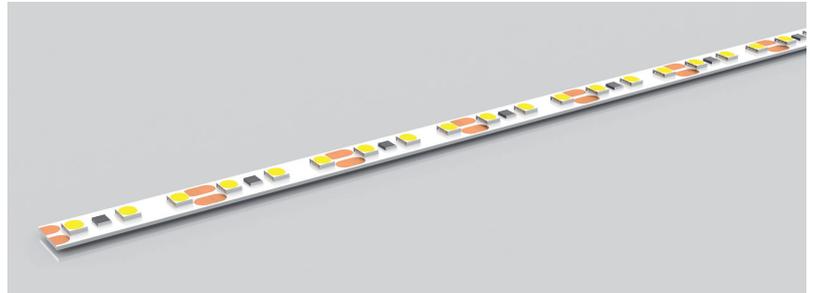

### Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021A-5000-27-609	12V	2700K	1550	19,2W/m	81lm/W
021A-5000-30-609	12V	3000K	1570	19,2W/m	82lm/w
021A-5000-42-608	12V	4200K	1600	19,2W/m	83lm/w
021A-5000-54-608	12V	5400K	1650	19,2W/m	86lm/w
021A-5000-65-612	12V	6500K	1600	19,2W/m	83lm/w
021A-5000-22-607	24V	2200K	1530	19,2W/m	80lm/w
021A-5000-27-606	24V	2700K	1550	19,2W/m	81lm/W
021A-5000-30-606	24V	3000K	1570	19,2W/m	82lm/w
021A-5000-42-604	24V	4200K	1600	19,2W/m	83lm/w
021A-5000-54-607	24V	5400K	1650	19,2W/m	86lm/w
021A-5000-65-607	24V	6500K	1600	19,2W/m	83lm/w

### Zeichnung / drawing

