


# Flexible LED Platine / FPC

## 2835 Top LED • 120LED/m • 28,8W/m



### Technische Daten / technical data

Maße / measurements (LxBxH):	5000x6x1,45mm
LED Type - LED/m:	2835 - 120LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	60mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

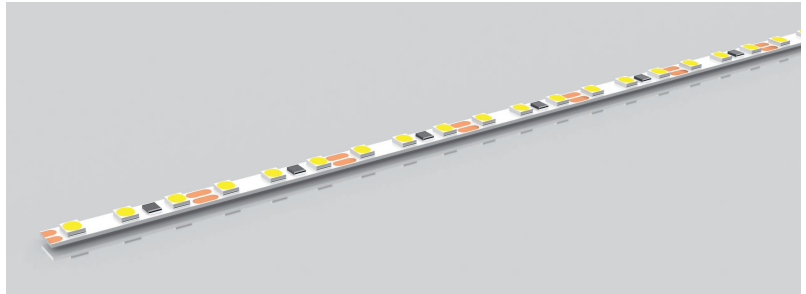

### Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021A-5000-27-601	12V	2700K	3100lm	28,8W/m	108lm/W
021A-5000-30-601	12V	3000K	3220lm	28,8W/m	112lm/W
021A-5000-42-601	12V	4200K	3350lm	28,8W/m	116lm/W
021A-5000-54-601	12V	5400K	3450lm	28,8W/m	120lm/W
021A-5000-65-601	12V	6000K	3400lm	28,8W/m	118lm/W
021A-5000-27-603	24V	2700K	3100lm	28,8W/m	108lm/W
021A-5000-30-605	24V	3000K	3220lm	28,8W/m	112lm/W
021A-5000-42-602	24V	4200K	3350lm	28,8W/m	116lm/W
021A-5000-54-603	24V	5400K	3450lm	28,8W/m	120lm/W
021A-5000-65-603	24V	6000K	3400lm	28,8W/m	118lm/W

Weitere Farben (1800K, 2200K, etc.) sind auf Anfrage erhältlich.

### Zeichnung / drawing

