


# Flexible LED Platine / FPC

## 2835 Top LED • 120LED/m • 9,6W/m



### Technische Daten / technical data

Maße / measurements (LxBxH):	5000x8x1,45mm
LED Type - LED/m:	2835 - 120LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	20mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

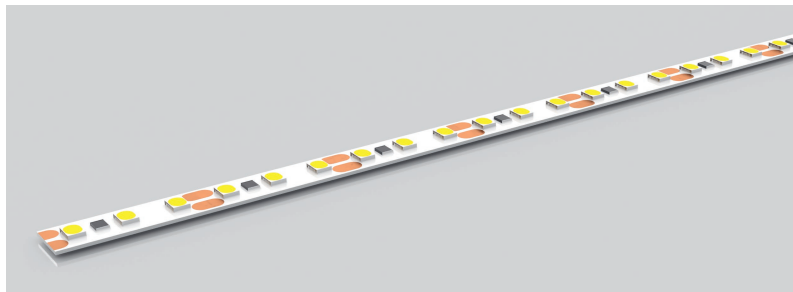

### Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021A-5000-27-608	12V	2700K	770lm	9,6W/m	79lm/W
021A-5000-30-608	12V	3000K	800lm	9,6W/m	83lm/W
021A-5000-42-610	12V	4200K	840lm	9,6W/m	85lm/W
021A-5000-54-602	12V	5400K	900lm	9,6W/m	92lm/W
021A-5000-65-611	12V	6000K	880lm	9,6W/m	90lm/W
021A-5000-27-605	24V	2700K	770lm	9,6W/m	79lm/W
021A-5000-30-602	24V	3000K	800lm	9,6W/m	83lm/W
021A-5000-42-606	24V	4200K	840lm	9,6W/m	85lm/W
021A-5000-54-604	24V	5400K	900lm	9,6W/m	92lm/W
021A-5000-65-606	24V	6000K	880lm	9,6W/m	90lm/W

Weitere Farben (1800K, 2200K, etc.) sind auf Anfrage erhältlich.

### Zeichnung / drawing

