


Flexible LED Platine / FPC

2835 Top LED • 210LED/m • 14,4W/m



Technische Daten / technical data

Maße / measurements (LxBxH):	5000x8x1,4mm
LED Type - LED/m:	2835 - 210LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	17mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

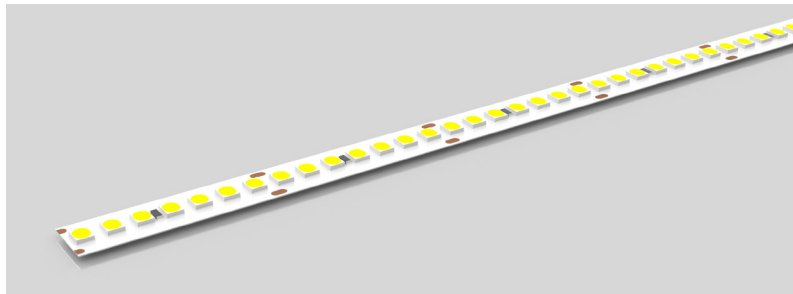

Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
	24V	2200K	1512lm*	14,4W/m	105lm/W
	24V	2400K	1555lm*	14,4W/m	108lm/W
	24V	2700K	1685lm*	14,4W/m	117lm/W
	24V	3000K	1742lm*	14,4W/m	121lm/W
	24V	4000K	1800lm*	14,4W/m	125lm/W
	24V	5000K	1771lm*	14,4W/m	123lm/W
	24V	6000K	1771lm*	14,4W/m	123lm/W

* Die effizienteren LED erzeugen eine höhere Lichtausbeute, als die bekannten mit einer geringeren Effizienz. Der Lichtstrom kann auf niedrigere Werte und dadurch weniger Leistungsaufnahme reduziert werden.

Zeichnung / drawing

