


Flexible LED Platine / FPC

2835 Top LED • 30LED/m • 2,4W/m



Technische Daten / technical data

Maße / measurements (LxBxH):	5000x8x1,45mm
LED Type - LED/m:	2835 - 30LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	20mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

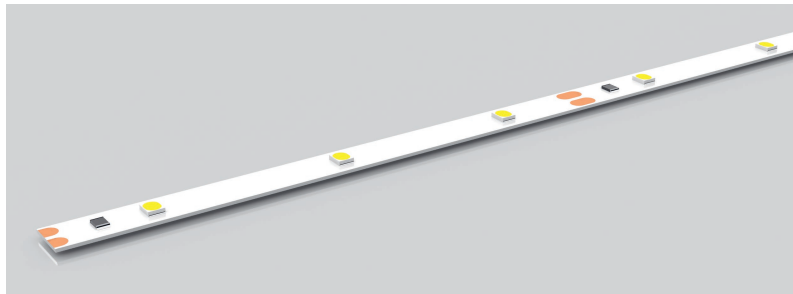

Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021F-5000-27-601	12V	2700K	190	2,4W/m	79lm/W
021F-5000-30-601	12V	3000K	200	2,4W/m	83lm/W
021F-5000-42-601	12V	4200K	210	2,4W/m	88lm/W
021F-5000-54-601	12V	5400K	195	2,4W/m	81lm/W
021F-5000-65-601	12V	6500K	200	2,4W/m	83lm/W

Zeichnung / drawing

