


Flexible LED Platine / FPC

2835 Top LED • 60LED/m • 4,8W/m



Technische Daten / technical data

Maße / measurements (LxBxH):	5000x8x1,45mm
LED Type - LED/m:	2835 - 60LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	20mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

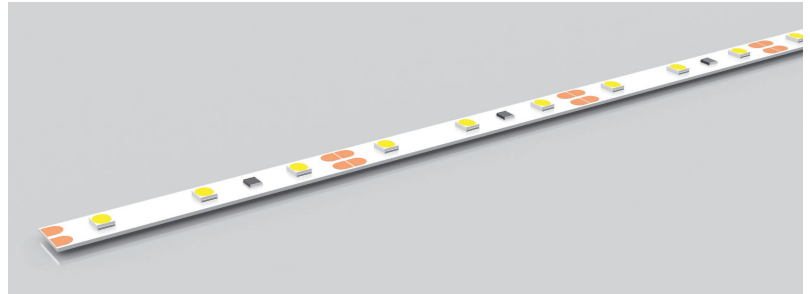

Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021D-5000-27-603	12V	2700K	380lm	4,8W/m	79lm/W
021D-5000-30-604	12V	3000K	400lm	4,8W/m	83lm/W
021D-5000-42-605	12V	4200K	410lm	4,8W/m	85lm/W
021D-5000-54-601	12V	5400K	440lm	4,8W/m	92lm/W
021D-5000-65-603	12V	6000K	430lm	4,8W/m	90lm/W
021D-5000-27-602	24V	2700K	380lm	4,8W/m	79lm/W
021D-5000-30-603	24V	3000K	400lm	4,8W/m	83lm/W
021D-5000-42-603	24V	4200K	410lm	4,8W/m	85lm/W
021D-5000-54-602	24V	5400K	440lm	4,8W/m	92lm/W
021D-5000-65-602	24V	6000K	430lm	4,8W/m	90lm/W

Weitere Farben (1800K, 2200K, etc.) sind auf Anfrage erhältlich.

Zeichnung / drawing

