


Flexible LED Platine / FPC

90 - 180LED/m • 4,8 o. 9,6W/m



Technische Daten / technical data

Maße / measurements (LxBxH):	5000x10x1,3mm
LED Type - LED/m:	2835 - 90/180LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	13mA
Befestigung / fixing:	3M Tape
CRI:	>80 (>90)
Temperaturbereich / Ta:	-20° / +50°

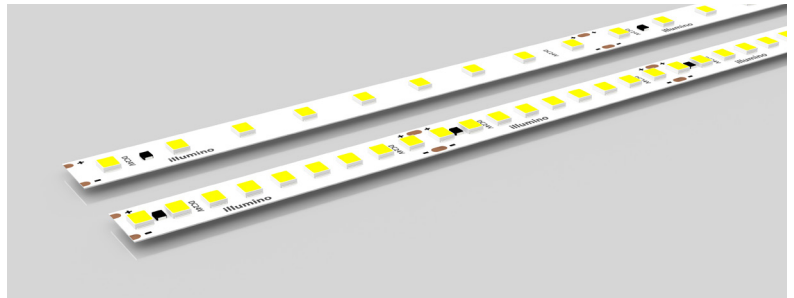

Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous lm/m	Leistung / power	Energieeffizienz / efficiency
	24V	2700K	950lm (*825lm)	4,8W/m	198lm/W (**172lm/W)
	24V	3000K	990lm (*840lm)	4,8W/m	206lm/W (**175m/W)
	24V	4000K	1035lm (*910lm)	4,8W/m	216lm/W (**190lm/W)
	24V	5000K	1025lm (*895lm)	4,8W/m	214lm/W (**186lm/W)
	24V	6000K	1025lm (*930lm)	4,8W/m	214lm/W (**186lm/W)
021N-5000-27-602	24V	2700K	1920lm (*1660lm)	9,6W/m	200lm/W (**173lm/W)
	24V	3000K	1985lm (*1670lm)	9,6W/m	207lm/W (**174lm/W)
021N-5000-42-602	24V	4000K	2100lm (*1830lm)	9,6W/m	219lm/W (**191lm/W)
	24V	5000K	2035lm (*1800lm)	9,6W/m	212lm/W (**188lm/W)
021N-5000-65-602	24V	6000K	2070lm (*1850lm)	9,6W/m	216lm/W (**193lm/W)

Zeichnung / drawing

