


Flexible LED Platine / FPC

Mini Cut • 120LED/m • 9,6W/m



Technische Daten / technical data

Maße / measurements (LxBxH):	5000x6/8x1,4mm
LED Type - LED/m:	2835 - 120LED/m
Schutzart / protection:	IP20
Strom pro LED:	20mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

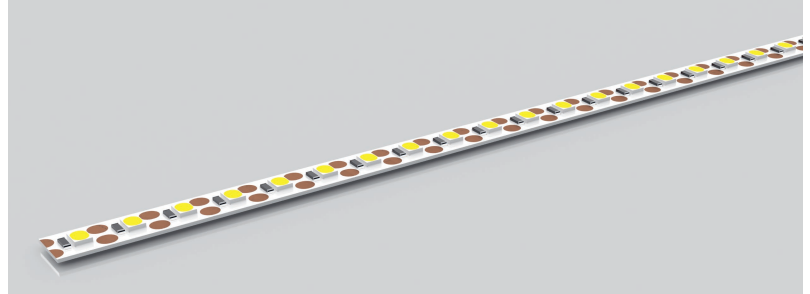

Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Breite width	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021A-5000-27-613	12V	2700K	8mm	750	9,6W/m	78lm/W
021A-5000-30-611	12V	3000K	8mm	820	9,6W/m	85lm/W
021A-5000-42-612	12V	4000K	8mm	900	9,6W/m	94lm/W
021A-5000-54-611	12V	5400K	8mm	860	9,6W/m	90lm/W
021A-5000-65-613	12V	6500K	8mm	850	9,6W/m	89lm/W
021A-5000-27-612	24V	2700K	8mm	750	9,6W/m	78lm/W
021A-5000-30-612	24V	3000K	8mm	820	9,6W/m	85lm/W
021A-5000-42-613	24V	4000K	8mm	900	9,6W/m	94lm/W
021A-5000-54-610	24V	5400K	8mm	860	9,6W/m	90lm/W
021A-5000-65-610	24V	6500K	8mm	850	9,6W/m	89lm/W
021A-5000-27-611	24V	2700K	6mm	750	9,6W/m	78lm/W
021A-5000-30-613	24V	3000K	6mm	820	9,6W/m	85lm/W
021A-5000-42-614	24V	4200K	6mm	900	9,6W/m	94lm/W
021A-5000-54-609	24V	5400K	6mm	860	9,6W/m	90lm/W
021A-5000-65-614	24V	6500K	6mm	850	9,6W/m	89lm/W

Zeichnung / drawing

