


Flexible LED Platine / FPC

Mini Cut • 60LED/m • 7,2W/m



Technische Daten / technical data

Maße / measurements (LxBxH):	5000x8x1,45mm
LED Type - LED/m:	2835 - 60LED/m
Schutzart / protection:	IP20
Strom pro LED:	20mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

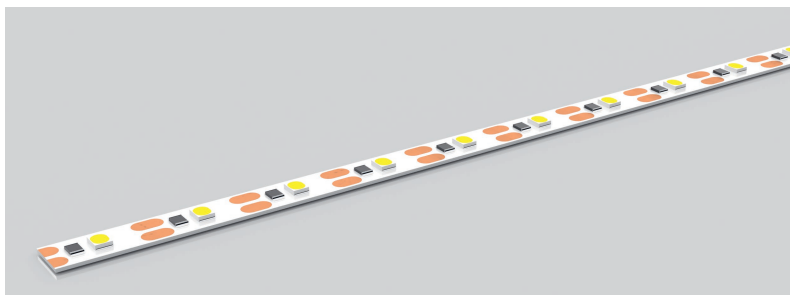

Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021D-5000-27-605	12V	2700K	580	7,2W/m	81lm/W
021D-5000-30-606	12V	3000K	650	7,2W/m	90lm/W
021D-5000-42-607	12V	4000K	700	7,2W/m	97lm/W
021D-5000-54-604	12V	5400K	680	7,2W/m	94lm/W
021D-5000-65-606	12V	6500K	670	7,2W/m	93lm/W
021D-5000-27-604	24V	2700K	580	7,2W/m	81lm/W
021D-5000-30-605	24V	3000K	650	7,2W/m	90lm/W
021D-5000-42-606	24V	4000K	700	7,2W/m	97lm/W
021D-5000-54-603	24V	5400K	680	7,2W/m	94lm/W
021D-5000-65-605	24V	6500K	670	7,2W/m	93lm/W

Zeichnung / drawing

