


Flexible LED Platine / FPC

RGB 5050 Top LED • 120LED/m • 29W/m



Technische Daten / technical data

Maße / measurements (LxBxH):	5000x12x2,1mm
LED Type - LED/m:	5050 - 120LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	60mA
Befestigung / fixing:	3M Tape
CRI:	-
Temperaturbereich / Ta:	-20° / +50°

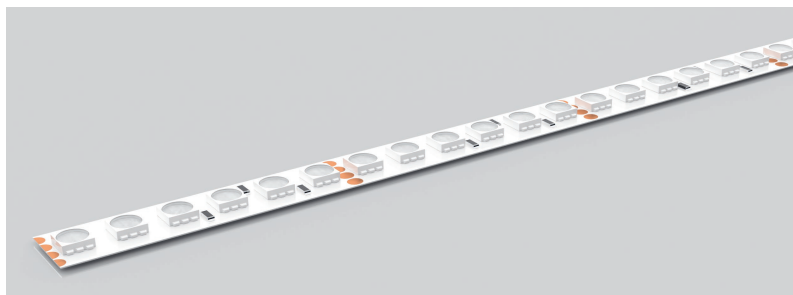

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021A-5000-RGB-501	24V	R/G/B	258lm/655lm/136lm	28,8W/m	37lm/W

Zeichnung / drawing

