


Flexible LED Platine / FPC

RGB 5050 Top LED • 60LED/m • 14,4W/m



Technische Daten / technical data


Maße / measurements (LxBxH):	5000x8x2,1mm
LED Type - LED/m:	5050 - 60LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	60mA
Befestigung / fixing:	3M Tape
CRI:	-
Temperaturbereich / Ta:	-20° / +50°

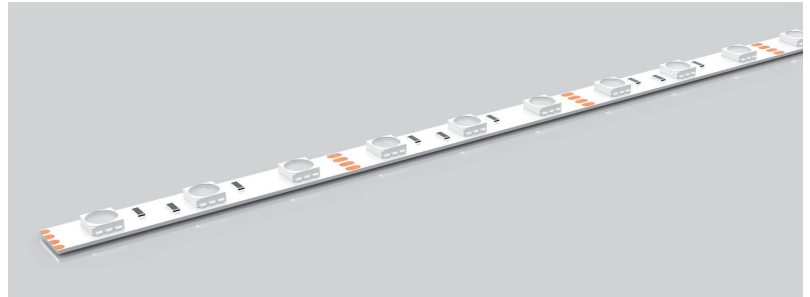

Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)v	Leistung / power	Energieeffizienz / efficiency
021D-5000-RGB-513	12V	R/G/B	130lm/330lm/70lm	14,4W/m	37lm/W
021D-5000-RGB-510	24V	R/G/B	130lm/330lm/70lm	14,4W/m	37lm/W


Zeichnung / drawing

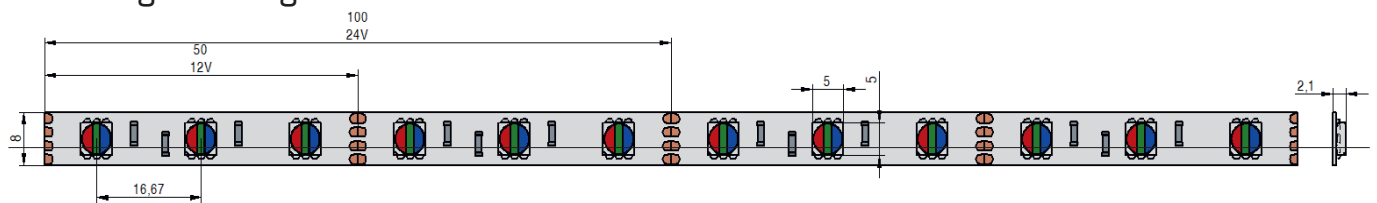

RGB 3838 Top LED • 144LED/m • 14,4W/m

Technische Daten / technical data

Maße / measurements (LxBxH):	5000x10x2,1mm
LED Type - LED/m:	3838 - 144LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	25mA
Befestigung / fixing:	3M Tape
CRI:	-
Temperaturbereich / Ta:	-20° / +50°

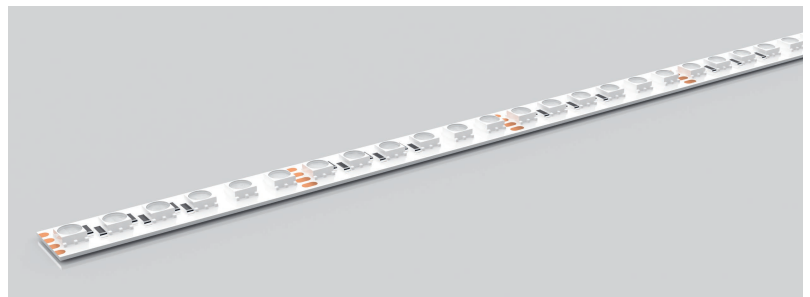

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021Q-5000-RGB-401	24V	R/G/B	124lm/512lm/103lm	14,4W/m	51lm/W

Zeichnung / drawing

