


# Flexible LED Platine / FPC

## WW/KW Top LED • 120LED/m • 19,2W/m




### Technische Daten / technical data

Maße / measurements (LxBxH):	5000x8x1,4mm
LED Type - LED/m:	2835 - 120LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	40mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

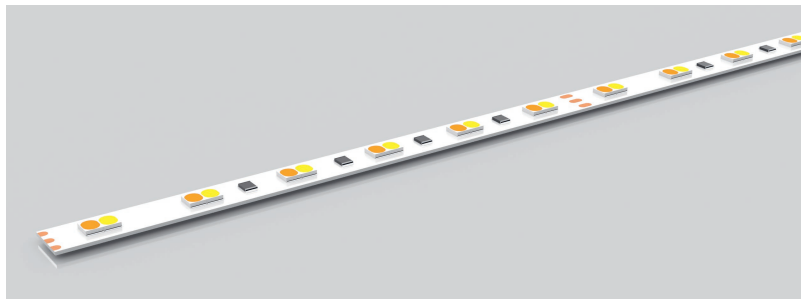


Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021A-5000-2765-004	24V	2700K / 6500K	1680lm	19,2W/m	88lm/W

### Zeichnung / drawing

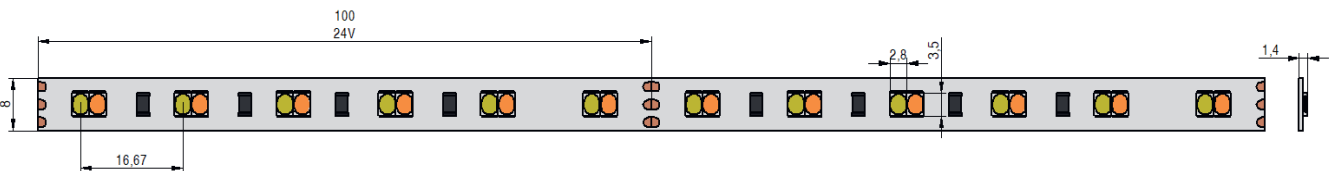

### Technische Daten / technical data

Maße / measurements (LxBxH):	5000x8x2,2mm
LED Type - LED/m:	3527 - 120LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	40mA
Befestigung / fixing:	3M Tape
CRI:	>90
Temperaturbereich / Ta:	-20° / +50°

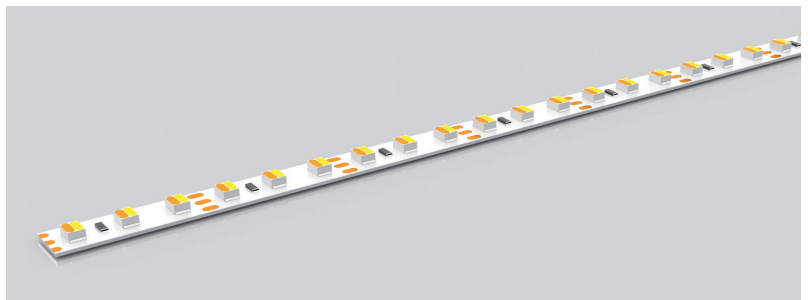

### Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021A-5000-2765-003	12V	2700K / 6500K	1680lm	19,2W/m	88lm/W
021A-5000-2765-002	24V	2700K / 6500K	1680lm	19,2W/m	88lm/m

### Zeichnung / drawing

