


# Flexible LED Platine / FPC

## RGB 3838 Top LED • 120LED/m • 9,6W/m




### Technische Daten / technical data 9,6W/m

Maße / measurements (LxBxH):	5000x5x2,1mm
LED Type - LED/m:	3838 - 120LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	20mA
Befestigung / fixing:	3M Tape
Bemerkung / comment:	Lmax=2500mm
Temperaturbereich / Ta:	-20° / +50°

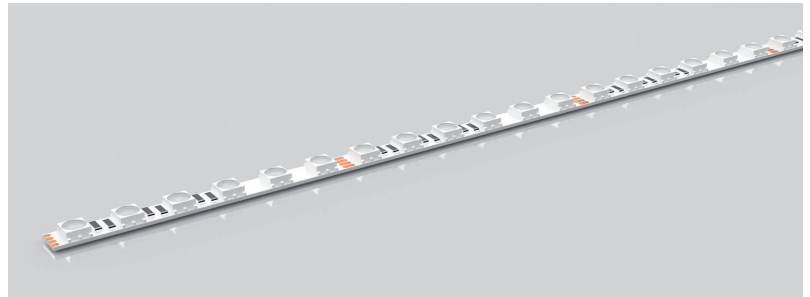

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021A-5000-RGB-402	24V	R/G/B	84lm/384lm/76lm	9,6W/m	57lm/W


### Zeichnung / drawing

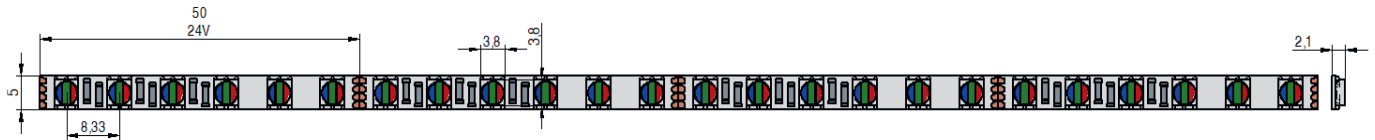

## RGB 3838 Top LED • 120LED/m • 14,4 - 25W/m

### Technische Daten / technical data 14,4 - 25W/m

Maße / measurements (LxBxH):	5000x8x2,1mm
LED Type - LED/m:	3838 - 120LED/m
Schutzart / protection:	IP20
Strom pro / current per LED:	30-52 mA
Befestigung / fixing:	3M Tape
Bemerkung / comment:	25W/m Lmax=2000mm
Temperaturbereich:	-20° / +50°

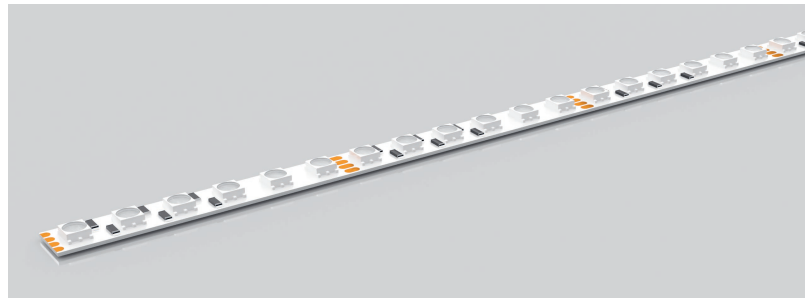

### Varianten / variants

Artikelnummer part number	Spannung voltage	Farbtemp. color temp.	Lichtstrom luminous (lm/m)	Leistung / power	Energieeffizienz / efficiency
021A-5000-RGB-401	24V	R/G/B	120lm/475lm/98lm	14,4W/m	48lm/W
021A-5000-RGB-403	24V	R/G/B	200lm/820lm/170lm	25W/m	48lm/W

### Zeichnung / drawing

